HUBLER BÉTON



hubler
la matière pour la création

PRODUCT DESCRIPTION

THE CONCRETE COMPOSITE PANEL IS AVAILABLE IN 1 THICKNESS AND 6 DESIGNS.
(This product is also available in 2-mm sheets in all 6 designs, 303 x 128 cm)

- The default backing panel is a 19 mm MDF panel or a 0.9 mm HPL panel.
- The back of the MDF panel is covered with a white melamine laminate. The back of the HPL panel is left unfinished.
- The top surface is covered with a flexible mineral concrete coating approximately 1 to 3 mm thick, depending on the surface. • The mineral concrete coating is classified as non-flammable A2-s1, d0 according to DIN EN 13501-1.
- It can be easily worked with conventional carbide-tipped woodworking tools.
- The surfaces are finished with a matte varnish.
- For heavier use, we recommend an additional coat of matte varnish.
- The finishes can be painted and are available in almost any color.

USE

For example: furniture, interior doors, cabinet fronts, store and exhibition booth design, interior design—such as wall paneling, platform construction, etc.

DESIGNS



FB120
béton lisse gris



FB121
béton lisse anthracite




FB122
béton effet bois



FB223
béton lumière
vintage



FB224
béton vintage

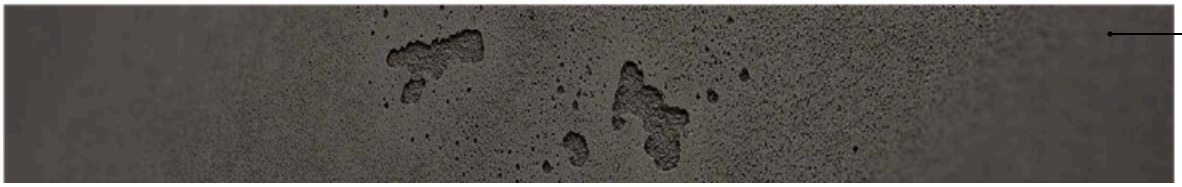

FB2 26
béton anthracite
vintage

TECHNICAL DETAILS

DIMENSIONS	MDF	HPL
STANDARD	2,600 X 1,010	3,030 X 1,280 mm
LARGEUR	mm 3,030 X	
MAXIMUM	1,200 mm 3,400	
CUSTOMIZED PRODUCTION	X 1,300 mm	
THICKNESS	approx. 20 mm	approx. 2 mm
WEIGHT	approx. 16	approx. 3 kg/m^2
	k/m^2	

PROCESSUS

SONGS
The edges must be fully protected by an ABS or real concrete edge. It is also possible to use the edging kit.

VERSION1: ABS OR REAL CONCRETE.

1. Deactivate the sanding unit and the polishing unit
2. Repaint and patinate any milled coating with a matte varnish.
3. Apply varnish again, if necessary

VERSION 2: PROCEED WITH THE BORDER KIT (SEE INSTRUCTIONS)

SAWING/DRILLING/MILLING
Stainless steel tools. Diamond-equipped tools are not necessary.

VIS
Resistance à l'extraction des vis identique au MDF pré-perçage recommandé.
OBLIGATION
Colle à bois commercial
ENTRETIEN Doit être traitée comme une surface normalement plaquée et peinte.
Nettoyage possible à l'aide d'un chiffon humidifié.
Emballage Couché à plat.
STOCKAGE Stocker les couches intermédiaires sèches avec une feuille de mousse. Protéger du gel.
ENVIRONNEMENT Le produit est sans danger pour l'environnement, peut être recyclé et jeté avec les ordures ménagères.

The information is provided to the best of our knowledge; however, its content is not legally binding. The user is not required to check that the materials are suitable for their intended use. Subject to technical modifications. The main component of the imi mineral coating is organic, so that color shades between different batches cannot be completely excluded. The samples of these materials show only the general appearance and cannot reflect characteristics such as color, texture and structure. Differences of any kind, as well as air inclusions, are natural and do not constitute grounds for complaint. Small deformation and slight displacements in the joint area and the formation of small gaps cannot be completely ruled out.